


Item || Split Core Current Transformer

Model || SCT-6000

Dimension (Unit: in)

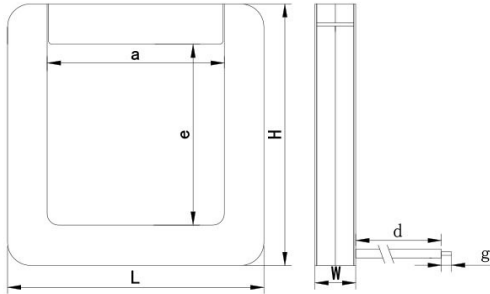

Outline Size			Window Size		Leads	
L	W	H	a	e	M	N
8.66	1.18	8.89	6.02	6.18	39.37	0.23

Electrical Diagram




Parameters

Current Range	≤5000A
Output	0.333V
Accuracy	1.0
Frequency	50/60HZ
Insulation Strength	3KV

Performance Curve

SCT-6000 3000A/0.33V Performance Curve:

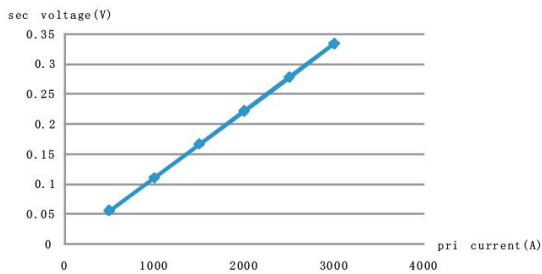

Specification

Leads: 1015# 20awg
 Operating Temperature: -20°C to +55°C
 Storage Temperature: -40°C to +70°C
 Features: Split core design, the split core design permits non-contact current measurements through magnetic field induction without requiring that the primary wire be taken offline and disconnected for CT installation. This method permits a safer, easy and portable current measurement